

ELECTRIC SLAB SCISSOR LIFTS

- Designed by a rental guy and built to last
- Packed with innovative features that deliver low total ownership costs



Saloon door-style entry gates as standard
Rigidly mounted upper controls to reduce loss & theft (equipped with a power outlet)
Dual shear scissor design for increased stack rigidity
Industry's largest kingpins require no maintenance



TAKE A VIDEO TOUR



Single wheel nut reduces maintenance costs
On-board diagnostics minimize service calls
Twin door component trays for access, even in confined spaces
"Inside out" maintenance design for easy access to components

Snorkel
FOR MORE INFORMATION
www.snorkellifts.com

SCISSOR LIFTS

PUSH AROUND & SELF-PROPELLED MINI LIFTS



Snorkel S3006P Snorkel S3008P Snorkel S3010P

Features

- Lightweight push around and self-propelled mini scissor lifts
- Easily passes through a standard doorway
- Durable design for tough site conditions

	S3006P	S3008P	S3010P
Max. working height	12' 6" (4.0m)	14' 2" (4.5m)	15' 10" (5.0m)
Max. platform height	6' 6" (2.0m)	8' 2" (2.5m)	9' 10" (3.0m)
Overall length	3' 11" (1.19m)	3' 11" (1.19m)	3' 11" (1.19m)
Overall width	2' 4" (0.75m)	2' 4" (0.75m)	2' 4" (0.75m)
Stowed height	5' 6" (1.7m)	5' 10" (1.8m)	5' 10" (1.8m)
Platform capacity	529 lbs (240kg)	500 lbs (227kg)	430 lbs (195kg)
Max. wind speed	0 mph (0m/s)	0 mph (0m/s)	0 mph (0m/s)
Raise / lower time	8 / 14 seconds	13 / 17 seconds	19 / 26 seconds
Power source	12V DC battery	12V DC battery	12V DC battery
Weight	682 lbs (310kg)	770 lbs (350kg)	815 lbs (370kg)

	S3010E	S3210P	S3215L
Max. working height	15' 11" (5.0m)	15' 10" (5.0m)	21' (6.6m)
Max. platform height	9' 11" (3.0m)	9' 10" (3.0m)	15' (4.6m)
Overall length	49.6" (1.26m)	3' 11" (1.2m)	81" (2.1m)
Overall width	30.3" (0.77m)	2' 8" (0.81m)	32" (0.81m)
Stowed height	5' 11" (1.8m)	5' 10" (1.8m)	75.25" (1.9m)
Ground clearance	2.3" (58mm)	n/a	2.5" (63mm)
Platform capacity	500 lbs (227kg)	529 lbs (240kg)	670 lbs (305kg)
Inside turning radius	0" (0m)	n/a	4" (0.1m)
Gradeability	25%	n/a	25%
Weight	1,091 lbs (495kg)	1,036 lbs (470kg)	2,100 lbs (955kg)

SCISSOR LIFTS

BATTERY ELECTRIC SLAB



Snorkel S3215E Snorkel S3219E Snorkel S3220E

Features

- Self-propelled electric slab scissor lifts
- Ideal for low level construction or maintenance applications
- Compact and nimble

	S3215E	S3219E	S3220E
Max. working height	21' (6.6m)	25' (7.79m)	26' (8.1m)
Max. platform height	15' (4.6m)	19' (5.79m)	20' (6.1m)
Overall length	70.4" (1.79m)	70.4" (1.79m)	90.6" (2.3m)
Overall width	32" (0.81m)	32" (0.81m)	32" (0.81m)
Stowed height	79" (2.02m)	83" (2.11m)	85.25" (2.17m)
Ground clearance	2.63" (66mm)	2.63" (66mm)	3.75" (95mm)
Platform capacity	600 lbs (272kg)	550 lbs (250kg)	900 lbs (409kg)
Inside turning radius	4" (0.1m)	4" (0.1m)	4" (0.76m)
Gradeability	25%	25%	25%
Weight	2,700 lbs (1,227kg)	3,170 lbs (1,438kg)	4,500 lbs (2,045kg)

	S3226E	S4726E	S4732E
Max. working height	32' (9.9m)	32' (9.9m)	38' (11.8m)
Max. platform height	26' (7.9m)	26' (7.9m)	32' (9.8m)
Overall length	90.6" (2.3m)	90.6" (2.3m)	90.6" (2.3m)
Overall width	32" (0.81m)	47" (1.19m)	47" (1.19m)
Stowed height	90.5" (2.3m)	90.2" (2.2m)	94.2" (2.39m)
Ground clearance	3.75" (95mm)	2.63" (66mm)	2.63" (66mm)
Platform capacity	500 lbs (250kg)	1,000 lbs (454kg)	700 lbs (318kg)
Inside turning radius	30" (0.76m)	21" (0.53m)	21" (0.53m)
Gradeability	25%	25%	25%
Weight	5,000 lbs (2,268kg)	4,950 lbs (2,250kg)	5,925 lbs (2,693kg)

SCISSOR LIFTS

BATTERY ELECTRIC SLAB




Snorkel S3019E Snorkel S4740E

Features

- Innovative electric slab scissor lifts
- Sunken scissor stack, all-electric drive, no hydraulic hoses (S3019E)
- Choose between electric or hydraulic drive (S4740E)

	S3019E	S4740E
Max. working height	25' (7.79m)	45' 5" (14.0m)
Max. platform height	19' (5.79m)	39' 5" (12.0m)
Overall length	4' 9" (1.45m)	4' 9" (1.45m)
Overall width	30.5" (0.77m)	47" (1.19m)
Stowed height	69.1" (2.02m)	101" (2.51m)
Ground clearance	3" (76mm)	2.63" (66mm)
Platform capacity	550 lbs (250kg)	550 lbs (250kg)
Inside turning radius	0" (0m)	21" (0.53m)
Gradeability	25%	25%
Weight	3,485 lbs (1,581kg)	6,825 lbs (3,100kg)

FIT TO BE COMPACT

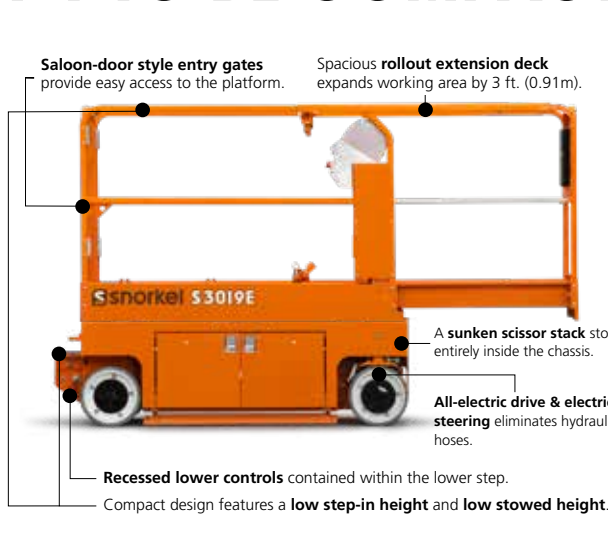

SCISSOR LIFTS

INTERNAL COMBUSTION & ELECTRIC NARROW ROUGH TERRAIN



Snorkel S2255RT Snorkel S2755RT

Features

- Ultra-narrow width for accessing confined spaces
- Superb all-terrain performance
- Internal combustion, bi-energy or zero emission lithium-ion battery power

	S2255RT	S2755RT
Max. working height	27' 10" (8.5m)	33' 1" (10.1m)
Overall length	10' 10" (3.3m)	10' 10" (3.3m)
Overall width	4' 9" (1.45m)	4' 9" (1.45m)
Stowed height	7' 8" (2.35m)	8' 3" (2.5m)
Platform capacity	925 lbs (420kg)	660 lbs (300kg)
Weight	5,313 lbs (2,410kg)	6,062 lbs (2,750kg)

	S2255RTE	S2755RTE
Max. working height	27' 10" (8.5m)	33' 1" (10.1m)
Overall length	10' 10" (3.3m)	10' 10" (3.3m)
Overall width	4' 9" (1.45m)	4' 9" (1.45m)
Stowed height	7' 8" (2.35m)	8' 3" (2.5m)
Platform capacity	925 lbs (420kg)	660 lbs (300kg)
Weight	5,313 lbs (2,410kg)	6,062 lbs (2,750kg)

SCISSOR LIFTS

INTERNAL COMBUSTION & ELECTRIC COMPACT ROUGH TERRAIN



Snorkel S3370RT Snorkel S3970RT

Features

- Compact dimensions with roll-out deck extension
- Equipped with powerful 4-wheel drive
- Internal combustion, bi-energy or zero emission lithium-ion battery power

	S2770RT	S3370RT	S3970RT
Max. working height	33' (10.1m)	39' (12.0m)	45' (13.8m)
Overall length	11' (3.4m)	11' (3.4m)	11' (3.4m)
Overall width	5' 10" (1.8m)	5' 10" (1.8m)	5' 10" (1.8m)
Stowed height	8' 7" (2.61m)	9' (2.7m)	9' 8" (2.95m)
Platform capacity	1,250 lbs (580kg)	1,000 lbs (450kg)	771 lbs (350kg)
Weight	6,636 lbs (2,886kg)	7,980 lbs (3,620kg)	8,355 lbs (3,790kg)

	S2770RTE	S3370RTE	S3970RTE
Max. working height	33' (10.1m)	39' (12.0m)	45' (13.8m)
Overall length	11' 3" (3.4m)	11' 3" (3.4m)	11' 3" (3.4m)
Overall width	5' 10" (1.8m)	5' 10" (1.8m)	5' 10" (1.8m)
Stowed height	8' 7" (2.61m)	9' (2.7m)	9' 8" (2.95m)
Platform capacity	1,250 lbs (580kg)	1,000 lbs (450kg)	771 lbs (350kg)
Weight	6,172 lbs (2,800kg)	7,980 lbs (3,620kg)	8,355 lbs (3,790kg)

SCISSOR LIFTS

INTERNAL COMBUSTION ROUGH TERRAIN



Snorkel S9043RT Snorkel S9070RT-HC

Features

- Large deck, high capacity rough terrain scissor lifts
- Dual extension decks available (standard on HC models)
- Ideal for construction applications

	S9033RT	S9043RT	S9053RT
Max. working height	39' (11.8m)	49' (15.1m)	59' (17.9m)
Overall length (with stabilizers)	15' 7" (4.77m)	15' 7" (4.77m)	15' 7" (4.77m)
Overall width	7' 6" (2.28m)	7' 6" (2.28m)	7' 6" (2.28m)
Stowed height	9' (2.77m)	9' 10" (2.99m)	10' 6" (3.2m)
Platform capacity	2,500 lbs (1,135kg)	1,500 lbs (681kg)	1,500 lbs (681kg)
Weight	16,302 lbs (7,401kg)	17,946 lbs (8,147kg)	19,448 lbs (8,829kg)

	S9031RT-HC	S9043RT-HC
Max. working height	37' (11.4m)	49' (15.1m)
Overall length	16' (4.87m)	16' (4.87m)
Overall width	7' 6" (2.28m)	7' 6" (2.28m)
Stowed height	9' 1" (2.77m)	9' 1" (2.77m)
Platform capacity	4,000 lbs (1,814kg)	3,500 lbs (1,587kg)
Weight	15,000 lbs (6,803kg)	17,000 lbs (7,711kg)

SCISSOR LIFTS

INTERNAL COMBUSTION & ELECTRIC ROUGH TERRAIN



Snorkel SL26RT Snorkel SL30RT

Features

- Innovative "Speed Level" lift - available as diesel or lithium-ion electric
- Auto-levels without the need for outriggers
- Powerful 4-wheel drive for superb rough terrain capability

	SL26RT	SL30RT
Max. working height	31' 6" (10.0m)	35' 4" (11.0m)
Max. platform height	25' 6" (8.0m)	29' 4" (9.0m)
Overall length	12' 5" (3.79m)	14' 1" (4.3m)
Overall width	7' (2.13m)	7' (2.13m)
Stowed height	8' 6" (2.6m)	8' 6" (2.6m)
Ground clearance (chassis)	12" (305mm)	12" (305mm)
Platform capacity	1,500 lbs (680kg)	1,300 lbs (590kg)
Inside turning radius	12' 10" (3.9m)	12' 10" (3.9m)
Gradeability	50%	50%
Weight	7,826 lbs (3,500kg)	7,495 lbs (3,400kg)

	SL26RTE	SL30RTE
Max. working height	31' 6" (10.0m)	35' 4" (11.0m)
Max. platform height	25' 6" (8.0m)	29' 4" (9.0m)
Overall length	12' 5" (3.79m)	14' 1" (4.3m)
Overall width	7' (2.13m)	7' (2.13m)
Stowed height	8' 6" (2.6m)	8' 6" (2.6m)
Ground clearance (chassis)	12" (305mm)	12" (305mm)
Platform capacity	1,500 lbs (680kg)	1,300 lbs (590kg)
Inside turning radius	12' 10" (3.9m)	12' 10" (3.9m)
Gradeability	50%	50%
Weight	7,826 lbs (3,500kg)	7,605 lbs (3,450kg)

MAST LIFTS

PUSH AROUND



Snorkel UL25 Snorkel UL32

Features

- Robust push-around mast lifts
- Easy loader system for flatbed vehicle transport
- Compact dimensions

	UL25	UL32
Max. working height	30' 11" (9.6m)	37' 9" (11.7m)
Max. platform height	24' 11" (7.6m)	31' 9" (9.7m)
Overall length	4' 2" (1.26m)	4' 4" (1.32m)
Overall width	2' 5" (0.74m)	2' 5" (0.74m)
Stowed height	6' 6" (1.99m)	8' 3" (2.51m)
Stabilizer footprint	6' 10" x 6' 6" (2.06m x 1.99m)	6' 10" x 6' 6" (2.06m x 1.99m)
Platform capacity	350 lbs (159kg)	300 lbs (136kg)
Max. wind speed	0 mph (0m/s)	0 mph (0m/s)
Weight (AC)	859 lbs (390kg)	959 lbs (435kg)
Weight (DC)	926 lbs (420kg)	1,025 lbs (465kg)

	UL40
Max. working height	46' (14.1m)
Max. platform height	20' (6.1m)
Overall length	4' 4" (1.32m)
Overall width	2' 5" (0.74m)
Stowed height	9' 6" (2.90m)
Stabilizer footprint	9' 8" x 9' 4" (2.95m x 2.85m)
Platform capacity	300 lbs (136kg)
Max. wind speed	0 mph (0m/s)
Weight (AC)	1,036 lbs (470kg)
Weight (DC)	1,102 lbs (500kg)

MAST LIFTS

SELF-PROPELLED



Snorkel TM12E Snorkel MB20J

Features

- Versatile electric self-propelled mast lifts
- Telescopic mast design provided stability at height
- Compact dimensions for excellent maneuverability

	TM12E	TM16E
Max. working height	18' (5.65m)	22' (6.87m)
Max. platform height	12' (3.65m)	16' (4.87m)
Overall length	4' 6" (1.37m)	4' 6" (1.37m)
Overall width	2' 6" (0.76m)	2' 6" (0.76m)
Stowed height	5' 6" (1.67m)	6' 6" (2.01m)
Ground clearance	3" (76mm)	3" (76mm)
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Inside turning radius	0" (0m)	0" (0m)
Gradeability	25%	25%
Weight	2,240 lbs (1,016kg)	2,430 lbs (1,105kg)